

Extract 850M

TECHNICAL INFORMATION

Manual retractable probe housing



All brand and product names are registered trademarks of
EXNER PROCESS EQUIPMENT GmbH

Imprint

Issued by:

Exner Process Equipment GmbH

Carl-Metz-Str. 26

D-76275 Ettlingen

Issue date: 2025-01-09

Effective: 25.10.2023

File: Technical information Extract 850M 231025

© 2020, Dipl.-Ing. [Graduate Engineer] Detlef Exner

All rights reserved, also for the translation.

The contents of these operating instructions may only be reproduced with written approval from EXNER PROCESS EQUIPMENT GMBH, ETTLINGEN.

All technical specifications, drawings, etc. are subject to copyright protection law.

We reserve the right to make technical changes.

Printed on chlorine and acid-free paper consisting of cellulose pulp.

Table of contents

1	Technical data	4
1.1	Material properties	4
1.2	Process connections	4
1.3	Sensors	4
1.4	Dimensions	5
1.5	Environmental conditions	6
1.6	EXtract 850M process conditions	6
1.7	Identification plate	6
2	Product description	7
2.1	Manual retractable (probe) housing EXtract 850M	7
2.1.1	Components	7
2.1.2	Versions	7
2.1.3	Drive	8
2.1.4	Immersion depth	8
2.1.5	Measurement	8
2.1.6	Service	8
2.2	Process integration	8
3	EXtract 850M order structure	10
4	Certificates and compliances	11

1 Technical data

1.1 Material properties

Medium-wetted components			
Probe housing			
EXtract	Stainless steel version	Plastic version	Guide rings / Seals
850M	1.4404/316 L	PP	PTFE / EPDM, FPM


1.2 Process connections

Thread	
Stainless steel and plastic version	NPT 1" (external) or G1" (external)

Ingold	
Stainless steel and plastic version	Ingold DN25 G 1 1/4" O-ring position 28 mm


1.3 Sensors

Gel-filled sensor			
EXtract	l [mm]	d [mm]	PG
850M	120	12	13.5

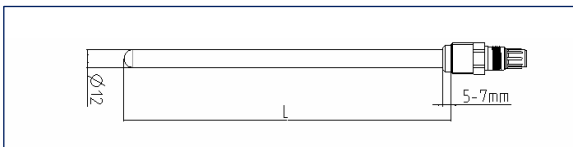


1.4 Dimensions

Threaded versions

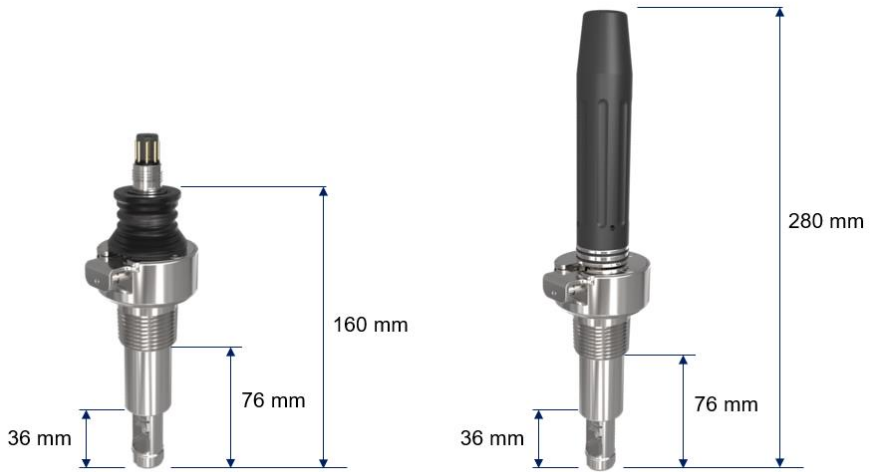

Versions with Ingold connection

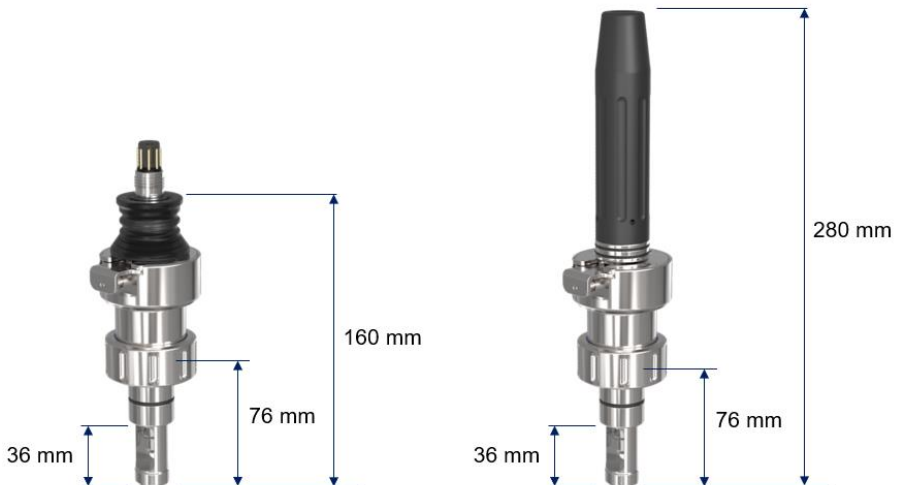

1.5 Environmental conditions

Ambient temperature -10...70 °C

Transport and storage temperature -20...80 °C

1.6 EXtract 850M process conditions

Max. permissible pressure PS: 6 bar (operable up to 2 bar)

Max. permissible temperature TS: 80 °C

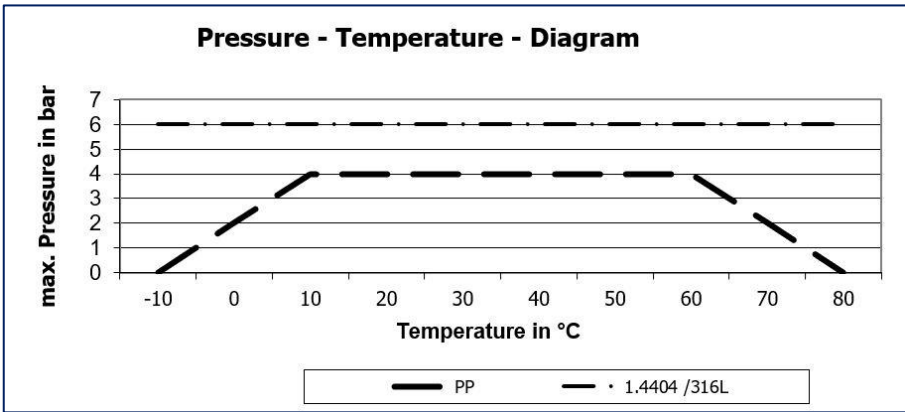


Fig. 1: Pressure temperature diagram EXtract 850M

1.7 Identification plate



Fig. 2: Identification plate

2 Product description

2.1 Manual retractable (probe) housing EXtract 850M

2.1.1 Components

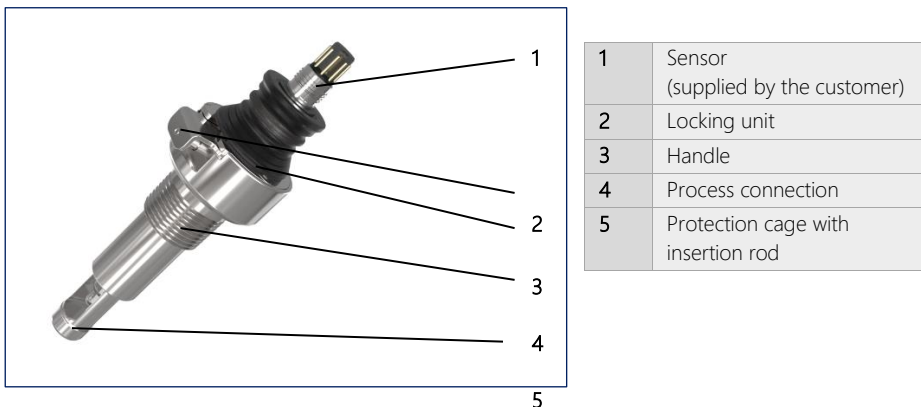


Fig. 3: Retractable (probe) housing EXtract 850M

2.1.2 Versions

The EXtract retractable (probe) housing is attached to tanks or pipes using a suitable process connection. In order to do justice to the diverse process properties, the retractable (probe) housing EXtract 850M is manufactured from stainless steel and plastic. Moreover you can select between different process connections and sealing materials. Cable protection can optionally be provided for the sensor used.

EXtract 850M

The probe housing EXtract 850M is a manually operated stainless steel or plastic retractable (probe) housing for the installation of Ø12 mm sensors on tanks or pipes.

The probe housing can be used for:

- Ø 12 mm/120 mm sensors with thread PG13,5
(pH glass and ISFET sensors, temperature, turbidity or optical sensors)
- Water / waste water

2.1.3 Drive

The manual drive of the probe housing is a mechanical linear drive which immerses the sensor into the medium by moving the insertion rod.

2.1.4 Immersion depth

The sensor immersion depth depends on the process connection selected → Chapter 3.5

2.1.5 Measurement

If the limit of travel for the position "Measurement" is reached, the insertion rod is fixed by the integrated locking unit. The sensor in the insertion rod is permanently mounted in this position and must not be removed. The sensor measures the chemical or physical properties of the process liquid.

2.1.6 Service

To remove the sensor, the probe housing must be moved to the "Service" position. For this, actuate the locking unit and pull the sensor out of the process using the handle until the insertion rod engages in the "Service" position.

Should the process pressure be so high that the locking unit is only hard to actuate or cannot be actuated, the sensor may not be removed without reduction of the process pressure.

2.2 Process integration

Pressure/Temperature

The pressure and temperature conditions are decisive for the selection of the suitable probe housing. Depending on the temperature and the material used, the retractable (probe) housing can be operated up to a pressure of 10 bar, operation up to 2 bar process pressure is possible!

The process temperature must lie between -10 °C and 80 °C.

NOTE

Observe the pressure and temperature diagrams in → Chapter 3.

Installation position

In principle, the probe housing can be operated in any position. To receive reliable measurement results, the properties of the sensor selected are decisive.

3 EXtract 850M order structure

	Code	Material (medium-wetted)	
	4404	Stainless steel, 1.4404 / 316 L	
	PP	PP	
	XXXX	Special version	
	Code	Sealing material (medium-wetted)	
	EDP	EPDM (FDA, USP VI)	
	FPM	FPM	
	XXX	Special version	
	Code	Sensor	
	120	120 mm PG 13,5 gel filled Ø 12mm	
	XXX	Special version	
	Code	Process connection	
	N10	NPT 1" (external)	
	G10	G 1" (external)	
	IN28	Ingold DN25 G1 1/4" O-ring position 28mm	
	XXX	Special version	
	Code	Cable protection	
	0	Without	
	1	With cable protection	
	X	Special version	
EXtract 850M			Order number

Example: EXtract 850M-4404-EPD-120-N10-0

4 Certificates and compliances

All freely available certificates and conformities can be found in their most current form in the “Downloads” section of our website.

To access the following address, enter it into your browser or scan the QR code below. Then select the relevant product and document from the list.

<https://e-p-e.com/en/downloads>



Depending on the product, additional certificates (e.g. material, surface, etc.) are available. If necessary, please send a corresponding request to Exner Process Equipment GmbH.



Exner Process Equipment GmbH
Carl-Metz-Str. 26
D-76275 Ettlingen
Germany

tel +49 (0)7243-94 54 29-0
fax +49 (0)7243-94 54 29-99
mail info@e-p-e.de

www.e-p-e.com